

TX 3500


5 kW HF Transmitter



TX 3500 5 kW HF Transmitter

The TX 3500 is a software-based HF transmitter rated at 5 kW PEP/average output power for communication in the short wave (HF) frequency band.

The transmitter comprises the exciter/receiver unit ERX 3000 T (exciter mode activated only), the power amplifier control unit PAC 3500, six all-solid-state power amplifier modules PA 3100 (each incl. an harmonic filter), and one power combiner with an internal balancing load. All devices are supplied by a 3-phase nominal 400 VAC power supply with neutral consisting of several modules.

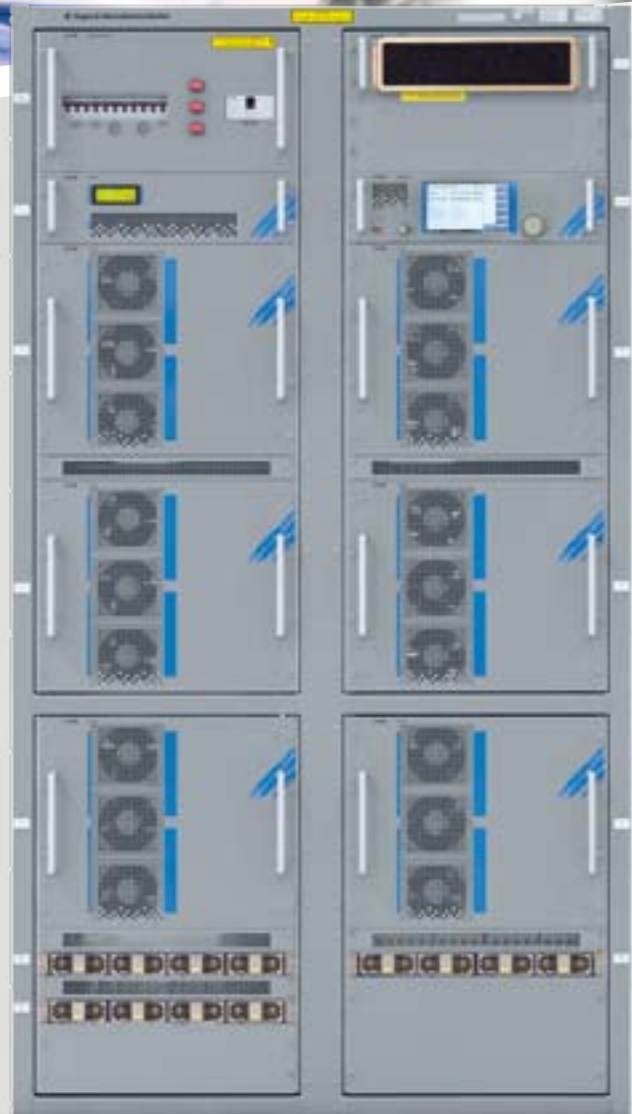

100 %
continuous operation

FEATURES

Frequency range 1.5 MHz to 30 MHz

Output power 5 kW PEP and average

Touch screen control Usable with gloves

LAN interface For remote control and voice over IP

Duty cycle 100 % continuous operation

Software defined Easy upgrade of waveforms

ALE Optional 2nd and/or 3rd generation ALE

Frequency hopping ECCM capability acc. to STANAG 4444

Remote control Full remote control capability

Built-in test Comprehensive built-in test



Hagenuk Marinekommunikation

A company of the ATLAS ELEKTRONIK Group

TX 3500

5 kW HF Transmitter

TRANSMIT DATA

Frequency range	1.5 MHz – 30 MHz
Frequency resolution	1 Hz
RF output power	5 kW \pm 1 dB, PEP/average at 50 Ω
Reducing of output power in steps of	-3 dB, -6 dB, -10 dB, -20 dB
Adjustment of maximum power	In 0.1 dB steps down to -9.9 dB
Channel memory	1000
Frequency stability	$< 1 \times 10^{-8}$ per day, options on request
Frequency changing time	≤ 10 ms

Modes of operation

Standard	AM (A3E), SSB (J3E USB/LSB), Data USB/LSB/ISB, ISB (B9W), CW (A1A), FSK (F1B), AME (R3E, H3E, H3W)
Optional	Link 11 with external L11 modem, acc. to MIL-STD-188-203-1A Frequency hopping: (with optional FH controller), acc. to STANAG 4444 L22 capability (with external L22 equipment) acc. to STANAG 5522

Input for external frequency standard	10 MHz, 0 dBm \pm 10 dB, 50 Ω , BNC connector
Control interface	RS 232, RS 422, RS 485 and RS 422 Bus 1200, 2400, 4800, 9600, 19200, 38400 Baud
LAN interface	Remote control + audio (VoIP)
Frontpanel socket	Microphone 2 mV / 150 Ω PTT (0V = transmit) Serial interface for software updates/upgrades

Comprehensive built-in test (BITE)

Suppression of unwanted sideband	> 60 dB/PEP
Carrier suppression	J3E, ISB, Link 11: > 50 dB/PEP H3E, H3W: 4.5 dB to 6 dB / PEP R3E: 18 dB \pm 2 dB / PEP

Suppression of intermodulation products 3. order	> 36 dB / PEP
Harmonics suppression	> 56 dB / PEP
Noise suppression (inband)	80 dBc / Hz
Noise suppression	$\Delta f = > 50$ kHz: > 138 dBc / Hz without interselector $\Delta f = > 500$ kHz: > 145 dBc / Hz without interselector

GENERAL DATA

Power supply	AC power supply: 3-phase, 350 VAC – 440 VAC, 47 Hz to 63 Hz, max 25 kVA, neutral connected
Environmental specifications	
- Operating temp.	0 $^{\circ}$ C to +55 $^{\circ}$ C
- Humidity	Max. 85 % at 25 $^{\circ}$ C
- EMI/EMC	Acc. to VG 95373/IEC 945 and MIL-STD-461 C/462

Dimensions

Height	2100 mm (45 U)
Depth	750 mm
Width	1160 mm (2 individual 19" sections)
Weight	Approx. 732 kg
Noise emission	< 70 dBA, temperature controlled fans
Air flow	Approx. 3.500 m ³ /h

INTERNAL OPTIONS

PSI 3000	HF pre- / interselector, 1.5 MHz - 30 MHz band pass filter, selectivity: min. 40 dB at 10 % frequency deviation, autom. tuning within < 10 ms, < 1.5 MHz low pass filter
STR 3000	Link 11 / 22 side tone receiver

Hagenuk
Marinekommunikation GmbH
Hamburger Chaussee 25
24220 Flintbek | Germany

Phone: +49 4347 714-101
Telefax: +49 4347 714-110
info@hmk.atlas-elektronik.com
www.hmk.atlas-elektronik.com

 **Hagenuk Marinekommunikation**
A company of the ATLAS ELEKTRONIK Group